

Under-kerb bridge drain

D400 - heavy traffic load



Code	MK35CZ
Material	Cast iron
Weight	58 kg
Norm	EN124-2
Package	20 ks/pal
Load class	Heavy traffic load

Mříž pro odvodnění mostů, 300x500, D400.

COVER:



- Hinge secured with a pin against removal from the frame
- Screw locking option
- Straight grille between ribs 35 mm
- Non-detachable connection of the grille to the frame
- Large inlet cross-section of the grid 665 cm²

FRAME:

- PUR damping insert on the frame resistant to oils and de-icing agents
- Variable seat height 85-165 mm

OTHER:

- black powder coated finish
- Transverse rectification in the range of 0-25 mm
- It meets the technical conditions of the Ministry of Transport of the Czech Republic TP 107 ? Drainage of road bridges.

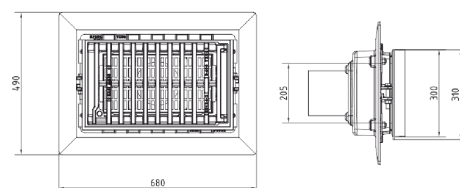

MAX. OPENING
ANGLE



ANTI-THEFT
PROTECTION



RAINWATER
DRAINAGE

