

## Inlet grille in cast-iron concrete frame

C250 - use max 0.5m into the roadway

# Europa

Code	<b>KM16P</b>
Material	<b>Concrete, Cast iron</b>
Weight	<b>68 kg</b>
Norm	<b>EN124-2</b>
Package	<b>16 ks/pal</b>

Grate 500x500mm for street gullies.

### COVER:



- Hinge secured with a pin against removal from the frame
- Grille curved between ribs 35 mm
- Non-detachable connection of the grille to the frame
- Inlet cross-section 1300 cm<sup>2</sup>

### FRAME:

- Cast-concrete frame with mounting for trap
- frame height 160 mm
- PUR damping insert on the frame resistant to oils and de-icing agents

### OTHER:

- Place on the 10A alignment ring.
- There must be at least a 20mm high mortar joint between the frame and the top of the drain with a strength of at least 45MPa.

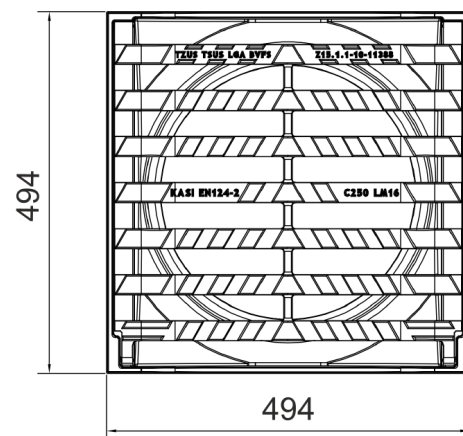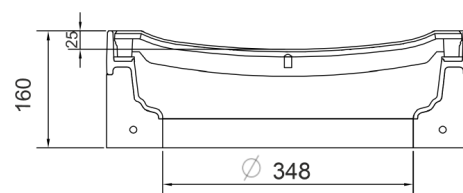

MAX. OPENING  
ANGLE



ANTI-THEFT  
PROTECTION



DAMPING INSERT



RAINWATER  
DRAINAGE