

## Inlet grille in cast-iron concrete frame

C250 - use max 0.5m into the roadway

## Standard

|         |                 |
|---------|-----------------|
| Code    | <b>KM56</b>     |
| Weight  | <b>186 kg</b>   |
| Norm    | <b>EN124-2</b>  |
| Package | <b>6 ks/pal</b> |

Mříž 1000 x 600 pro Horskou vpust'.  
Pro manipulaci jsou nutná tři závěsná oka HLMZ16.

### COVER:




- Detachable connection of the grille to the frame
- Lattice with regular rib.

### FRAME:

- Cast-concrete frame without mounting for the trap
- PUR damping insert on the frame resistant to oils and de-icing agents
- frame height 120 mm

### OTHER:

- Use only for approved Mountain Inlets
- There must be at least a 20mm high mortar joint between the frame and the top of the drain with a strength of at least 45MPa.

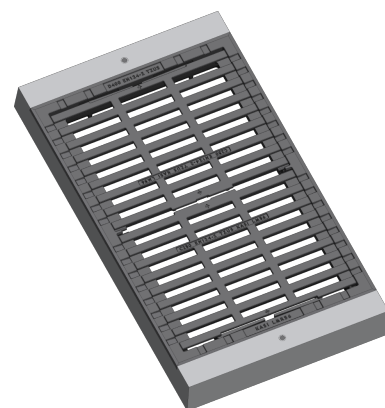

DAMPING INSERT



RAINWATER  
DRAINAGE

