

## Inlet grille in cast-iron concrete frame

E600 - extreme load

# Europa

|          |                            |
|----------|----------------------------|
| Code     | <b>KMA19</b>               |
| Material | <b>Concrete, Cast iron</b> |
| Weight   | <b>91 kg</b>               |
| Norm     | <b>EN124-2</b>             |
| Package  | <b>16 ks/pal</b>           |

Grate 500x500mm for street gullies.

### COVER:




- Hinge with possibility of removal from the frame
- Grille curved between ribs 35 mm
- Detachable connection of the grille to the frame
- Inlet cross-section 1300 cm<sup>2</sup>

### FRAME:

- Cast-concrete frame with mounting for trap
- frame height 160 mm
- PUR damping insert on the frame resistant to oils and de-icing agents

### OTHER:

- Place on the 10A alignment ring.
- There must be at least a 20mm high mortar joint between the frame and the top of the drain with a strength of at least 45MPa.

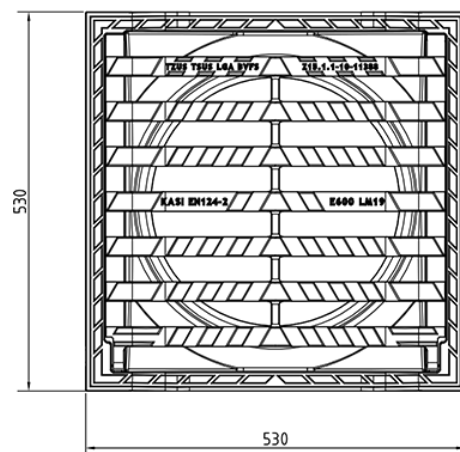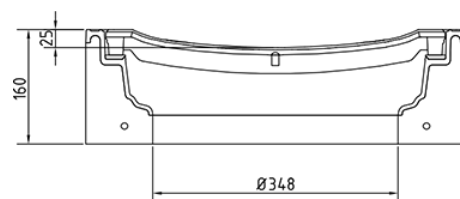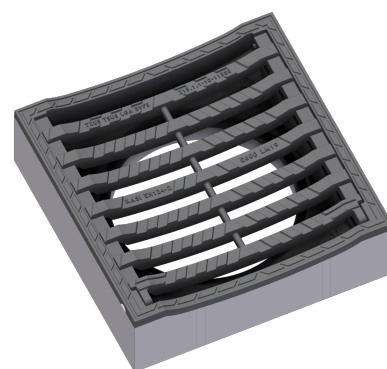

MAX. OPENING  
ANGLE



DAMPING INSERT



RAINWATER  
DRAINAGE