

Inlet grille in cast-iron concrete frame

C250 - use max 0.5m into the roadway

Code	KMC01P
Material	Concrete, Cast iron
Weight	90 kg
Norm	EN124-2
Package	12 ks/pal

Obrubníková vpust' 530x500mm pro uliční vpusti třída zatížení C250

COVER:



- Hinge secured with a pin against removal from the frame
- Non-detachable connection of the grille to the frame

FRAME:

- Cast-concrete frame with mounting for trap
- PUR damping insert on the frame resistant to oils and de-icing agents

OTHER:

- Place on the 10A alignment ring.
- There must be at least a 20mm high mortar joint between the frame and the top of the drain with a strength of at least 45MPa.

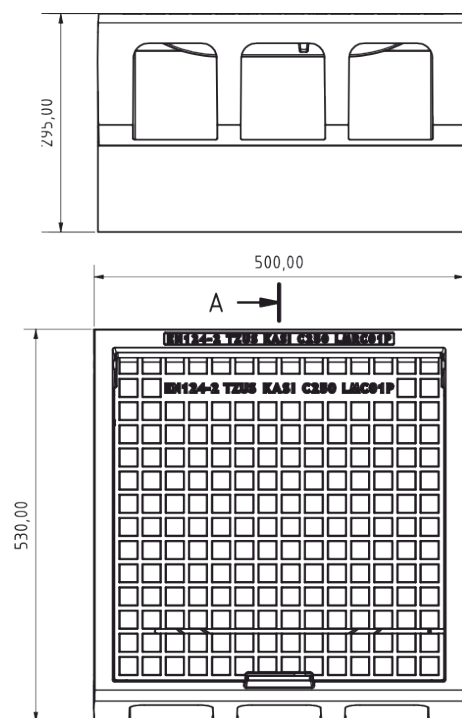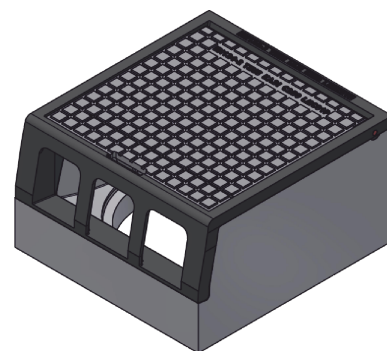

MAX. OPENING
ANGLE



ANTI-THEFT
PROTECTION



RAINWATER
DRAINAGE