Technical sheet

Manhole cover with ventilation in a cast-iron concrete frame

D400 - extreme traffic load

Standard

D400 TIR DN 600

Code	**KDB63**
Material	**Concrete, Cast iron**
Weight	**154 kg**
Norm	**EN124-2**
Package	**8 ks/pal**
Load class	**Extreme traffic load**

cover without hinge, horizontal PUR shock-absorbing lining on frame, horizontal and vertical PUR shock-absorbing lining on lid , without spring-loaded lid locking in frame

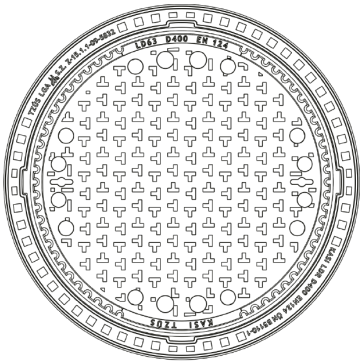

COVER:

- Integrated KASI-PUR damping insert with high resistance
- Cast iron with ventilation and anti-slip design.
- Lid weight 83kg
- Custom theme/logo option

FRAME:

- Cast-concrete frame without mounting for the trap
- Frame height 160 mm
- Use with BAR-V and BAR adjustment rings
- Integrated PUR damping insert with high resistance

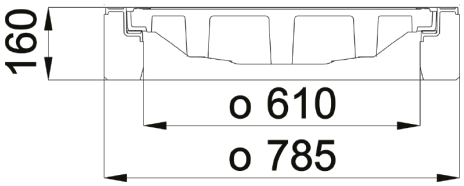

OTHER:

- The cover is supplied without surface treatment - painted variants can be ordered
- Suitable for places with extreme traffic load
- custom lid motif possible

CUSTOMER SOLUTIONS

KASI PUR
DAMPING INSERT

275 kg/m²
HATCH WITHOUT HINGE

KASI spol. s.r.o., Chrudimská 1602, 535 01 Přelouč, tel.: +420 466 501 755, www.kasi.cz