

Concrete leveling ring with lock



For cones and cover plates for 120 mm

Code	BAR-V04
Material	Concrete
Weight	26 kg
Norm	DIN1917
Package	17 ks/pal

Concrete ring, anti-shift lock, 625/865mm, height 40mm

OTHER:

- Concrete 35/45 chemical resistance class XF4 - according to DIN 4034
- Compensation rings under DN600 covers.
- The rings must be placed on the top part of the shaft and always on top of each other on a mortar or grout bed with a minimum strength of 45MPa and resistance of XF4.

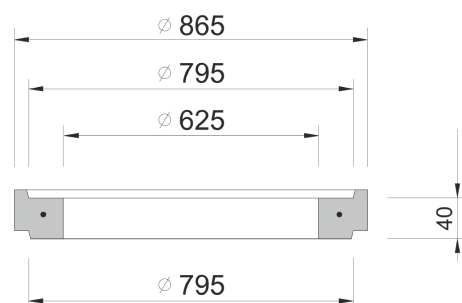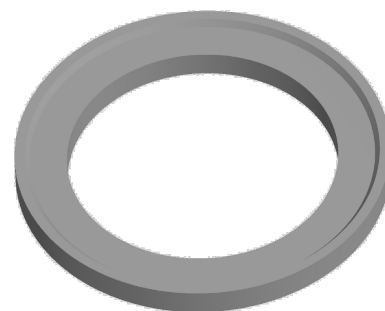

HEIGHT
ADJUSTMENT

