

## Concrete leveling ring with lock



For cones and cover plates for 120 mm

|          |                  |
|----------|------------------|
| Code     | <b>BAR-V08</b>   |
| Material | <b>Concrete</b>  |
| Weight   | <b>52 kg</b>     |
| Norm     | <b>DIN1917</b>   |
| Package  | <b>14 ks/pal</b> |

Concrete ring, anti-shift lock, 625/865mm, height 80mm

### OTHER:

- Concrete 35/45 chemical resistance class XF4 - according to DIN 4034
- Compensation rings under DN600 covers.
- The rings must be placed on the top part of the shaft and always on top of each other on a mortar or grout bed with a minimum strength of 45MPa and resistance of XF4.

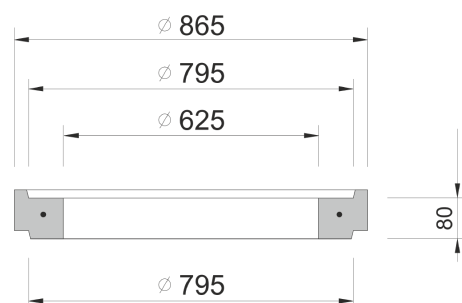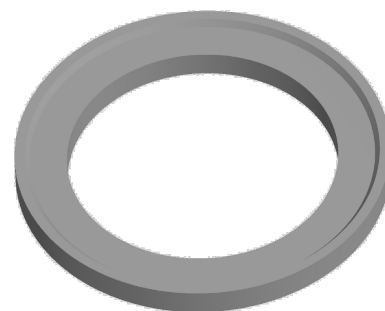

HEIGHT  
ADJUSTMENT

