

Concrete leveling ring with lock



For cones and cover plates for 120 mm

Code	BAR-VS
Material	Concrete
Weight	51 kg
Norm	DIN1917
Package	10 ks/pal

Concrete ring, anti-shift lock, 625/865mm, height 60mm/100mm

OTHER:

- Concrete 35/45 chemical resistance class XF4 - according to DIN 4034
- Compensation rings under DN600 covers.
- The rings must be placed on the top part of the shaft and always on top of each other on a mortar or grout bed with a minimum strength of 45MPa and resistance of XF4.

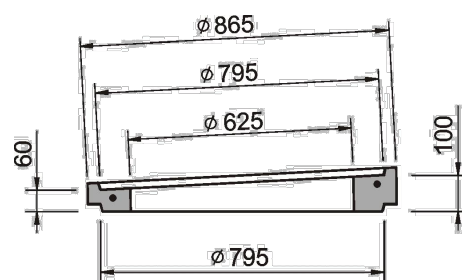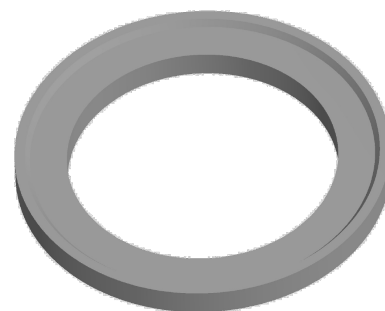

HEIGHT
ADJUSTMENT

