

## Manhole cover with ventilation in a self-leveling frame

D400 - extreme traffic load

# Standard

|            |                             |
|------------|-----------------------------|
| Code       | <b>KDM63</b>                |
| Material   | <b>Cast iron</b>            |
| Weight     | <b>113 kg</b>               |
| Norm       | <b>EN124-2</b>              |
| Package    | <b>10 ks/pal</b>            |
| Load class | <b>Extreme traffic load</b> |

cover without hinge, horizontal PUR shock-absorbing lining on frame, horizontal and vertical PUR shock-absorbing lining on lid , without spring-loaded lid locking in frame

### COVER:

- | Integrated KASI-PUR damping insert with high resistance
- | Cast iron with ventilation and anti-slip design.
- | Lid weight 83kg
- | Custom theme/logo option

### FRAME:



- | Self-leveling frame without mounting for trap
- | Frame height 160 mm
- | Use with BAR-V and BAR adjustment rings
- | Integrated PUR damping insert with high resistance
- | Installation without guide ring - the frame can be inserted directly into the shaft

### OTHER:

- | The cover is supplied without surface treatment - painted variants can be ordered
- | Suitable for places with extreme traffic load
- | custom lid motif possible



KDM63

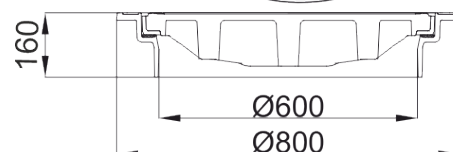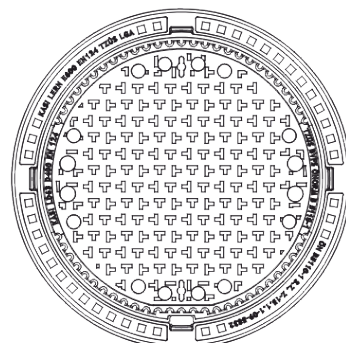

CUSTOMER  
SOLUTIONS



DAMPING INSERT



HATCH WITHOUT  
HINGE